

## Reduction of Salinity from sea water using air micronanobubbles and graphene in laboratory scale

Johana Tapia<sup>a,c</sup>, Jhonny Valverde Flores<sup>a, b,\*</sup>

<sup>a</sup>University Cesar Vallejo – Lima Norte, Peru.

<sup>b</sup>Universidad Tecnológica del Peru

<sup>c</sup>Institute of Nanotechnology, Centre of Research and Training to the Regional Development (CINCADER).  
Lima 39, Peru.

[jhoval1@yahoo.es](mailto:jhoval1@yahoo.es)

### Resumen

El objetivo de la investigación fue reducir la salinidad de las aguas de mar de San Pedro, Lurín, Peru. El método propuesto fue un pre tratamiento con Micro-Nanoburbujas (MNBs) de aire en diferentes tiempos y un post-tratamiento con grafeno a diferentes concentraciones, a esto se le denominó Grafenano. La primera etapa consistió en pasar primero las muestras recolectadas por el generador de MNBs, que permitió reducir los parámetros físicos y químicos; la segunda etapa consistió en filtrar el agua tratada con MNBs utilizando grafeno en tres proporciones 5g, 10g y 15g, que permitió reducir la concentración de sales disueltas. La salinidad del agua de mar se determinó así como los parámetros físico-químicos antes y después del tratamiento. Se caracterizaron las micronaburbujas y el grafeno. Los resultados obtenidos fueron: remoción de Turbidez en 96% (de 27.57 NTU a 1.06 NTU), de conductividad en 65% (de 49.01 mS/cm a 17.04 mS/cm), de DBO5 en 70% (de 2.42 mg/L a 0.72 mg/L) y una remoción de sales de 47% (de 34.46 g/L a 18.41 g/L).

**Palabras clave:** agua de mar, salinidad, grafeno, Micronanoburbuja, tratamiento

### Abstract

The objective of the research was to reduce the salinity of the waters of San Pedro, Lurín, Peru. The proposed method was a pre-treatment with Micro-Nanobubbles (MNBs) of air at different times and a post-treatment with graphene at different concentrations, this was called Grafenano. The first stage was to first pass the samples collected by the MNBs generator, which allowed to reduce the physical and chemical parameters; The second stage consisted of filtering the water treated with MNBs using graphene in three proportions 5 g, 10 g and 15 g, which allowed to reduce the concentration of dissolved salts. The salinity of the seawater was determined as well as the physical-chemical parameters before and after the treatment. The air micronanobubbles and graphene were characterized. The results obtained were: removal of Turbidity in 96% (from 27.57 NTU to 1.06 NTU), conductivity in 65% (from 49.01 mS/cm to 17.04 mS/cm), of BOD5 in 70% (from 2.42 mg/L to 0.72 mg/L) and a salt removal of 47% (from 34.46 g/L to 18.41 g/L).

**Keywords:** seawater, salinity, graphene, Micronanobubble, treatment.

## 1. Introduction

Fresh water is a scarce resource and a fundamental factor for global sustainability and economic, environmental and social development. This resource is essential in all activities, both agricultural, domestic and industrial. Today, the increase in water demand has been increasingly prominent due to demographic and economic growth.

According to the UN, areas that are below 1700 m<sup>3</sup> (annual water supply per person) experience water stress and if it falls below 1000 m<sup>3</sup> there is talk of water scarcity. In relation to this, Peru has a population of 31,448,625 people, with 64,000 m<sup>3</sup> of water per capita per year. On the other hand, Lima hosts 9 million 985 thousand 664 people with 125 m<sup>3</sup> of water per capita per year (Chillón, Rímac and Lurín). This situation shows that thousands of Peruvians are experiencing great tension due to the availability of drinking water (AQUAFONDO, 2016). This problem occurs throughout Peru, since there are different factors that reduce the availability (quantity and quality) of this water resource, such as climatic conditions, geographic distribution, population growth, extractive activities, increased droughts and desertification, and so on.

Although Peru is considered as one of the main countries with the largest water reserve, there are 2.7 million Peruvians who do not have drinking water services, Lima exceeds 700 thousand people (SUNASS, 2016). This reality faces 16 districts between Lima and Callao, where 88% of water is distributed through cisterns. One of them includes the district of Lurin, whose population centers, such as San Pedro, are supplied with groundwater by a system of tubular wells without a storage system for housing with distribution by pumping, providing high costs of 2 to 10 soles per liter. (INTEGRATION, 2017).

Researches have been conducted to reduce the salinity of marine waters to obtain drinking water such as: reverse osmosis system and photovoltaic energy (Soto G., Soto M., 2013), crystallization treatment using chitosan to reduce the amount of salinity of seawater (Chacón, 2016); the solar treatment of seawater (Aylas, 2017); electromagnetic irradiation (solar and artificial) using water surfaces coated with graphite (Rainer et al., 2016), and capillary flows (Garcia, 2013).

Graphene is an atomically thick, two dimensional sheet composed of sp<sup>2</sup> carbons in a honeycomb structure. It can be viewed as the building block for all the other graphitic carbon allotropes. There are many potential applications for graphene, including but not limited to: additive for mechanical, electrical, thermal, barrier and fire resistant properties of a polymer; surface area component of an electrode for applications such as fuel cells, super-capacitors and lithium ion batteries; conductive, transparent coating for the replacement of indium tin oxide; and components in electronics.

The Micronanobubbles (MNBs) are characterized by: their size, shape, contact angle, surface tension and internal pressure, the rate of rise of the Micronanobubbles, the pressure of the Micronanobubbles, the temperature, is altered according to the change in properties of Micronanobubbles so if the conductivity increases the viscosity of the liquid and the surface tension decreases (Tsuge, 2014).

The Microbubbles (MBs) have diameter more than 100 µm, the micro-nanobubbles (MNBs) have diameter between 1 to 100 µm and the nanobubbles (NBs) have diameter less than 1 µm within the fluid field (Valverde, 2016). The micro-nanobubbles generation technology in water is applied in: sea water, water bodies, groundwater, domestic wastewater and industrial wastewater (Valverde, 2017).

## 2. Materials and Methods

The design is pre-experimental at the explanatory level. The study population was represented by the marine waters that circulate in the San Pedro de Lurín Beach, with a coastal extension of 5 meters deep. With an area it is comprised between the limits of: Mamacona beach (298078 E-8639537 S) and Arica beach (293335 E- 8642017 S) in Lima, Peru.

The stages of the investigation are described below:

### Step 1: Diagnosis of the study area.

The control points (P1, P2 and P3) for the sampling of the coastal marine waters of San Pedro beach were established by the location and delimitation of the study area through the Google Earth program. One in the area with the highest incidence of visitors, and two at both ends to determine the concentration variation of the physical and chemical parameters. The division of the area was carried out in accordance with the National Protocol for the monitoring of water quality of surface water resources No. 010-2016-ANA. (See Figure 1).



Figure 1. Map of the study area  
Source: Google Earth. 2017

### Step 2: Initial analysis of the sample

A preliminary preliminary analysis was carried out. The samples obtained were placed in 1 L plastic containers labeled and labeled according to the parameters analyzed for their conservation and subsequent analysis in the laboratory. Subsequently, the samples collected were taken to the laboratory where their physical parameters (temperature, turbidity, and conductivity) and chemical parameters (BOD5, COD, chloride ions, and hydrogen potential) were analyzed and evaluated.

### Step 3: Water treatment with air Micronanobubbles and Graphene Air Micro-Nanobubbles

The representative samples were transported to the laboratory for further treatment, where the MicroNanobubbles equipment was first used. The treatment time was 20, 40 and 60 minutes. For the generation of Micronanobubbles, air was used at a pressure of 80 PSI, a flow of 7.05 L/min. The average value of the diameter of the MNBs of the 3 repetitions performed is 1.65  $\mu\text{m}$ .

Then these samples were subjected to a filtering system using graphene that acted as a filter for the separation of ions.

## Characterization of Graphene

The analysis to determine the characterization of graphene was carried out using the Raman spectroscopy method.

Figure 2 shows the Raman spectra of representative graphite and graphene powder samples measured at a range of 1000 to 3200  $\text{cm}^{-1}$  with excitation wavelength of 514 nm. Where the G and 2D bands present significant changes in the shape, line width and intensity of graphite peaks compared to graphene. The most intense characteristics are in the G peak that oscillate from 1500 to 1600  $\text{cm}^{-1}$  and a second band observed in the 2D peak whose frequency values are higher than those of the D peak, these range between 2650 to 2800  $\text{cm}^{-1}$

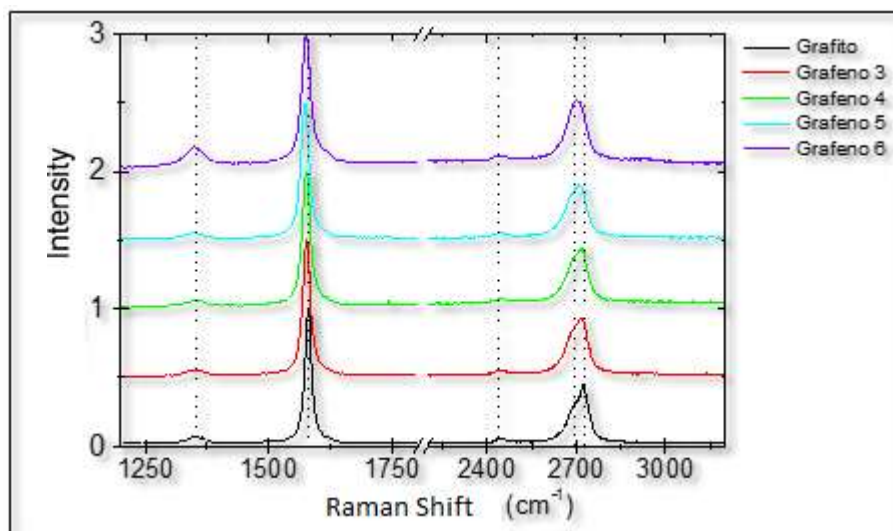


Figure 2. Raman spectra of Graphite and Graphene  
Source: Service made from Centro de caracterización de materiales, PUCP, 2017

The process of reducing salts is shown in the following figure

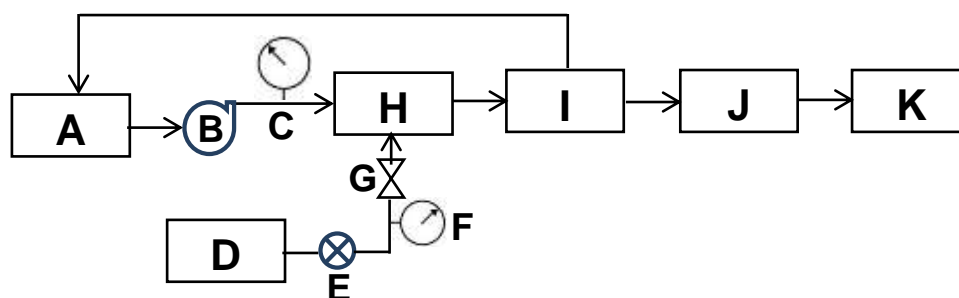


Figure 3. Presentation of the salts reduction process. Where, A: sea water tank, B: pump, C: flowmeter, D: air generator, E: pressure valve, F: pressure manometer, G: valve (general), H: MNBs generator, I: wastewater with air MNBs, J: Filter with graphene, K: treated water tank.

### Step 4: Final analysis of water samples after treatment

The final analysis of salinity and physical and chemical parameters were carried out in the laboratory after treatment with MNBs and Graphene.

The percentage of removal was calculated using the following equation:

$$\%R = \frac{C_i - C_f}{C_i} * 100 \dots\dots\dots (1)$$

Where:  
C<sub>i</sub> is the initial concentration, C<sub>f</sub> is the final concentration.

### 3. Results

This section details the results obtained from salinity, physical and chemical parameters before and after treatment with MNBs and graphene.

From the data obtained in the laboratory, the following results were obtained, which are detailed below:

The salinity of the seawater for the initial samples M1, M2 and M3 are: 34.46 g/L, 34.56 g/L and 34.48 g/L respectively. After 60 minutes of treatment using 15 grams of graphene, the salinity in the three samples is 18.41 g/L, 18.88 g/L and 18.92 g/L respectively.

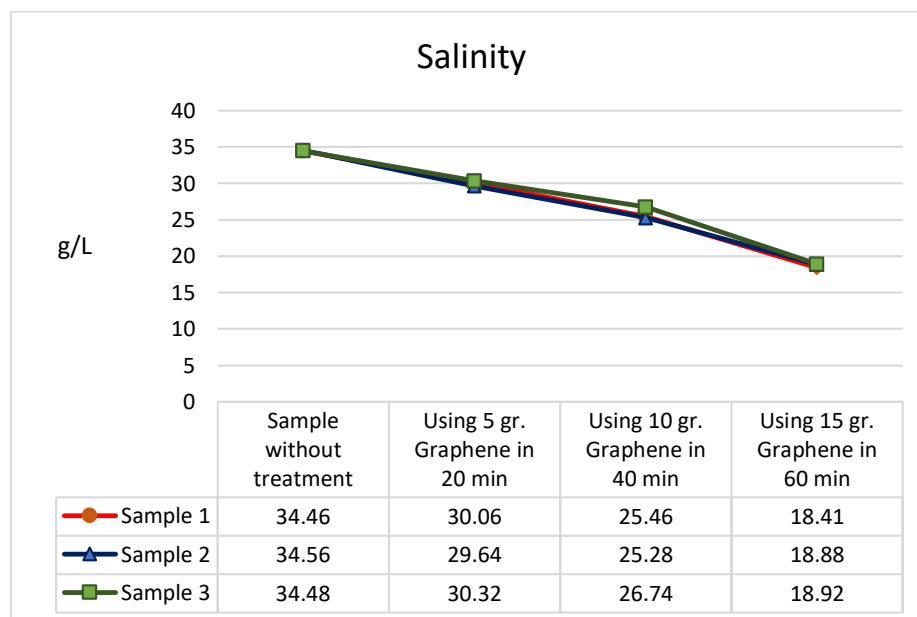


Figure 4. Results of Salinity

The conductivity for the initial samples of sea water M1, M2 and M3, was: 49.01 mS/cm, 49.15 mS/cm and 49.21 mS/cm respectively. After 60 minutes of treatment using 15 grams of graphene the conductivity was: 17.04 mS/cm 17.55 mS/cm 18.04 mS/cm respectively.

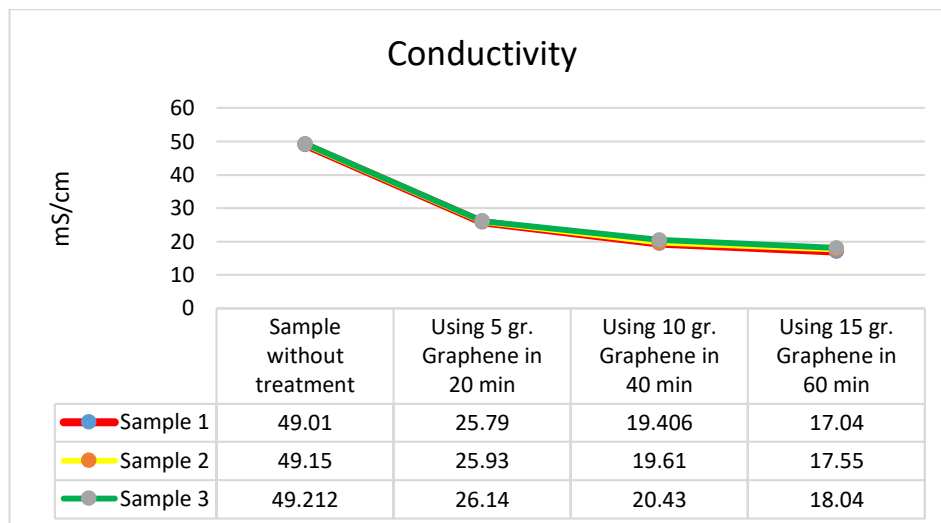


Figure 5. Results of conductivity

The turbidity for the initial samples of sea water 1, 2 and 3, are: 27.57 NTU, 28.72 NTU and 30.76 NTU respectively. After 60 minutes of treatment using 15 grams of graphene, the turbidity was: 1.06 NTU 1.68 NTU 2.10 NTU respectively.

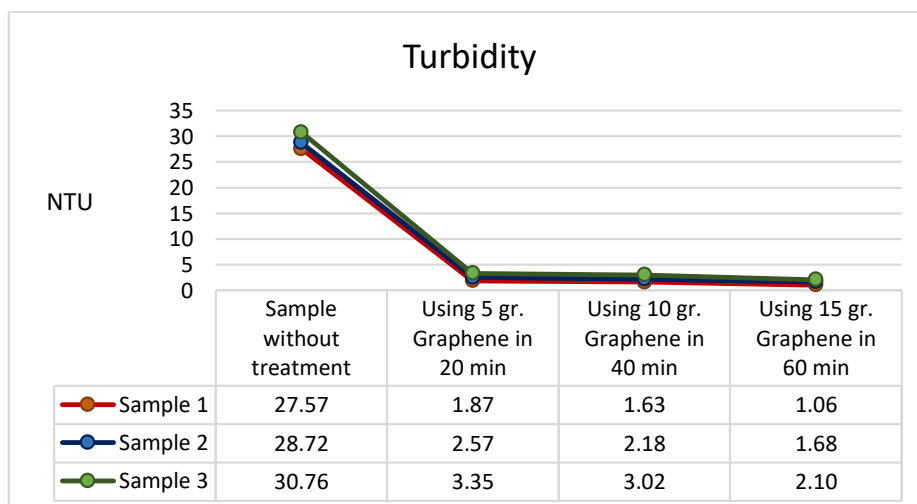


Figure 6. Results of turbidity

The chloride ions for the initial samples of sea water 1, 2 and 3, were: 0.96 g/L, 0.94 g/L and 0.97 g/L respectively. After 60 minutes of treatment using 15 grams of graphene the chlorides were: 0.96 g/L, 0.94 g/L and 0.97 g/L respectively

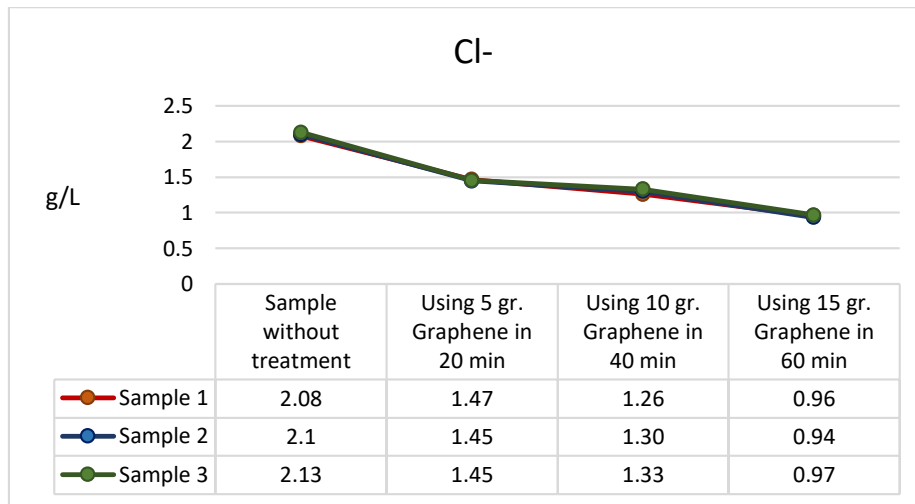


Figure 7. Results of chlorides ions

The pH for the initial samples of sea water 1, 2 and 3, were: 5.45, 5.47 and 5.52 respectively. After 60 minutes of treatment using 15 grams of graphene the pH values were 7.22, 6.99 and 7.04 respectively.

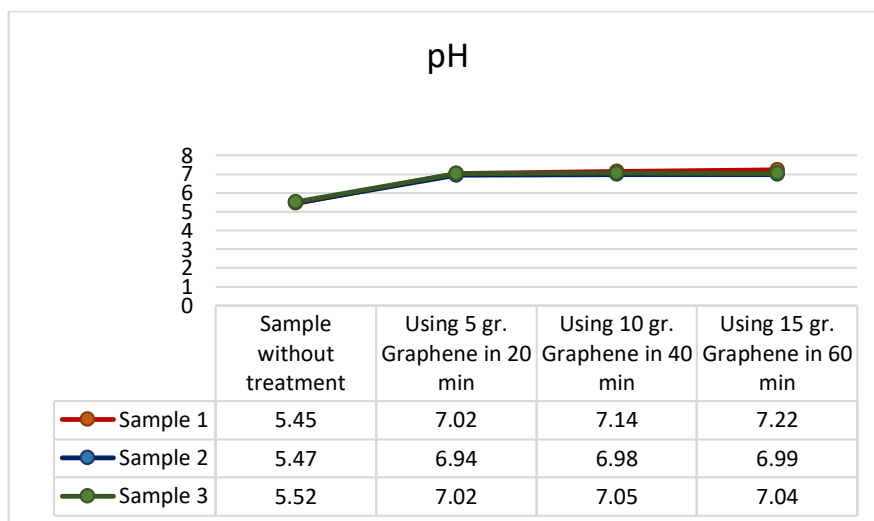


Figure 8. Results of pH

The BOD5 for the initial samples of sea water 1, 2 and 3, was: 1.42 mg/L, 2.42 mg/L and 2.53 mg/L respectively. After 60 minutes of treatment using 15 grams of graphene, the BOD5 values were: 0.45 mg/L, 0.72 mg/L and 0.82 mg/L respectively.

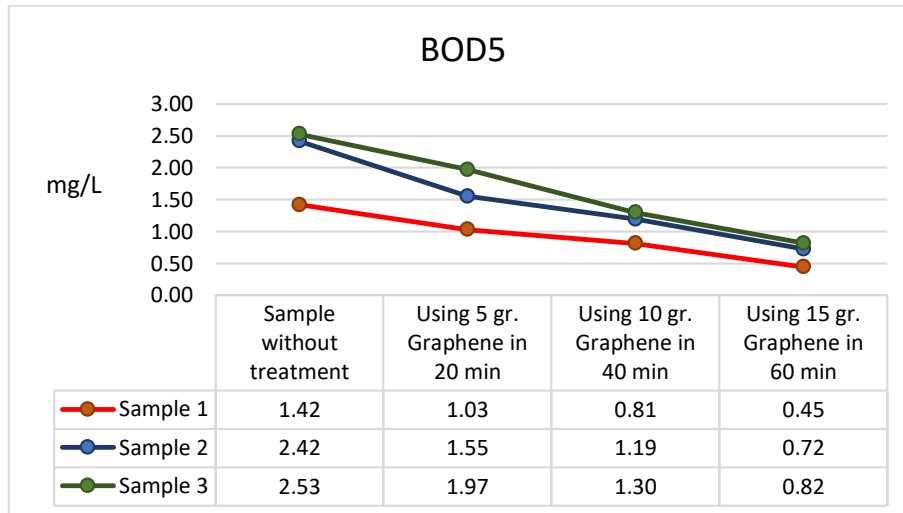


Figure 9. Resultados de BOD5

The COD for the initial samples of sea water 1, 2 and 3 was: 130 mg/L, 131.7 mg/L and 132.9 mg/L respectively. After 60 minutes of treatment using 15 g. of graphene the COD values were: 39.90 mg/L, 41.28 mg/L and 41.44 mg/L respectively.

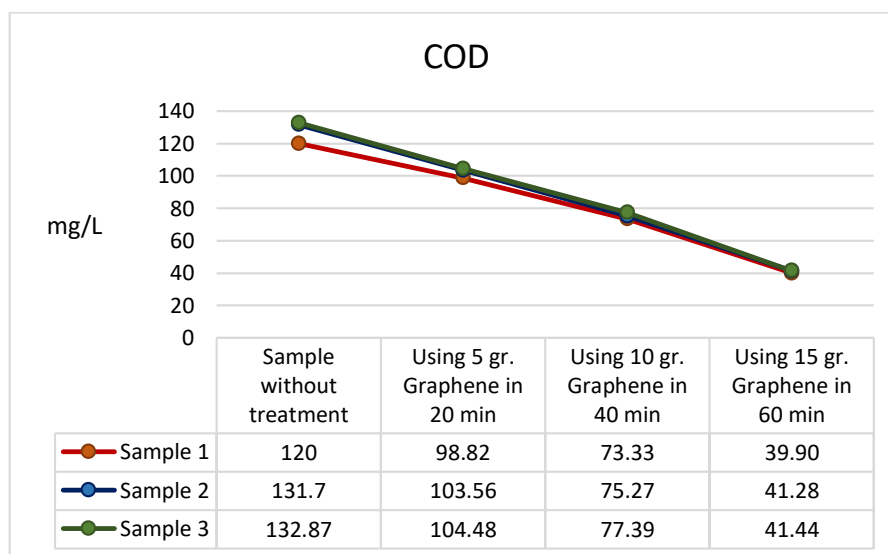


Figure 10. Results of COD

### Salinity Removal in the treatment with air MNBs and Graphene:

The removal of salts was determined by each sample, observing that the greatest salt removal occurred in the third time of 60 minutes and with 15 g graphene tending to have a value of 47% (from 34.46 g/L to 18.41 g/L), 45% (from 34.56 g/L to 18.88 g/L) 45% (from 34.58 g/L to 18.92 g/L).

Table 1. Remotion of Salinity

	Salinity (g/L)	Remotion (%)
<b>Initial Sample 1</b>	34.46	
<b>M1T1</b>	30.06	13
<b>M1T2</b>	25.46	26
<b>M1T3</b>	18.41	47
<b>Initial Sample 2</b>	34.56	
<b>M2T1</b>	29.64	14
<b>M2T2</b>	25.28	27
<b>M2T3</b>	18.88	45
<b>Initial Sample 3</b>	34.48	
<b>M3T1</b>	30.32	12
<b>M3T2</b>	26.74	22
<b>M3T3</b>	18.92	45

## 4. Conclusions

From the results obtained in the present investigation, the following conclusion was reached:

- The system of reduction of salts using Grafenano at laboratory scale improves the quality of beach water, whose efficiency values are: 47%, 45% and 45%, showing that the highest percentage of salinity removal was in the third treatment time with Micronanobubbles and a post-treatment with 15g of graphene.
- It was possible to significantly reduce the concentration of salts to the seawater samples from San Pedro beach, in: 47% (from 34.46 g/L to 18.41 g/L), 45% (from 34.56 g/L to 18.88 g/L) and 45% (from 34.48 g/L to 18.92 g/L) respectively, using Grafenano at laboratory scale. Being the values of greater removal in a treatment time of 60 min with MNBs and a post-treatment at a graphene ratio of 15g.
- The turbidity of seawater samples from San Pedro beach was significantly reduced: turbidity by 96% (from 27.57 NTU to 1.06 NTU), 94% (from 28.72 NTU to 1.68 NTU) and 93% (from 30.76 NTU) to 2.10 NTU). Conductivity was reduced by: 65% (from 49.01 mS/cm to 17.04 mS/cm), 64% (from 49.15 mS/cm to 17.55 mS/cm) and 63% (from 49.21 mS/cm to 18.04 mS/cm) respectively.
- With respect to the pH values increases of 5.45, 5.47 and 5.52 before treatment, to values of 7.22, 6.99 and 7.04 after the treatment respectively. Being these directly proportion to the conductivity.
- It was possible to significantly reduce the chemical parameters to the samples of sea water: from BOD5 in 69% (from 1.42 mg/L to 0.45 mg/L), 70% (from 2.42 mg/L to 0.72 mg/L) and in 68 % (from 1.97 mg/L to 0.82 mg/L).

## Acknowledgements

We gratefully acknowledge to the Department of Environmental engineering, University Cesar Vallejo – Lima Norte, for giving facilities in environmental issues. We also thank to the Institute of Nanotechnology, Centre of Research and Training to the Regional Development, (In Spanish, Centro de Investigación y Capacitación para el Desarrollo Regional-CINCADER) for allowing us to use the equipment to generate micro-nanobubbles and technical experiences.

## References

- AQUAFONDO, 2017, Agencia Digital. 05 de octubre de 2017. Available in: <http://aquafondo.org.pe/>
- Aylas, Aracely, 2017, Obtención de agua potable mediante un tratamiento solar (destilador cascada) del agua de mar en el distrito de la Punta- Callao. Thesis in environmental engineering. Lima: Universidad Cesar Vallejo.
- Chacon, Dianne, 2016, Tratamiento de cristalización utilizando el quitosano para la reducción de sal en el agua de mar, en la playa Miramar, Ancón-Lima. Thesis in environmental engineering. Lima: Universidad Cesar Vallejo.
- Rainer Christoph et al., 2016, Estudio de materiales grafíticos comunes como aceleradores de evaporación de agua bajo irradiación luminosa por Realidad y Reflexión [online]. Julio-diciembre 2016, n°44. ISSN: 1992-6510. Available in: <http://icti.ufg.edu.sv/doc/RyRN44-chmv.pdf>
- García, Alfonso, 2013, Desalinización de aguas salobres mediante el uso de flujos capilares. Master Thesis in advanced technology. México: Centro de investigación en ciencia aplicada y tecnología avanzada, 73 pp.
- INTEGRACIÓN, 2017, Peruanos paga hasta diez veces más por agua potable [en línea]. RPP NOTICIAS. 02 de marzo del 2017. Available in: <http://rpp.pe/politica/estado/peruanos-pagan-hasta-diez-veces-mas-por-agua-potable-noticia-1034466>
- Soto, Guido y Soto, Manuel, 2013, Proyecto de Desalinización de agua de mar mediante sistema osmosis inversa y energía fotovoltaica para provisión de agua potable en isla damas, Región de Coquimbo. Chile: PHI, ISBN: 976-92-9089-192-5. Available in: <http://unesdoc.unesco.org/images/0023/002309/230987s.pdf>
- SUNASS, 2016, Lima: Superintendencia Nacional de Servicios de Saneamiento. Available in: <http://www.sunass.gob.pe/boletin2016/febrero/notacentral1.html>
- Tsuge, Hideki, 2014, Micro-And Nanoburbubles. USA: Pan Stanford publishing, ISBN: 9789814463102. Available in: [https://books.google.com.pe/books?id=KilbBAAAQBAJ&printsec=frontcover&source=gbs\\_ge\\_summary\\_r&cad=0#v=onepage&q&f=false](https://books.google.com.pe/books?id=KilbBAAAQBAJ&printsec=frontcover&source=gbs_ge_summary_r&cad=0#v=onepage&q&f=false)
- Valverde, Jhonny. 2016. Nanotechnology for the Environmental Engineering. In: First International Congress in environmental Engineering oriented to environmental technologies: 6th to 11th October. Lima, pp. 26.
- Valverde, Jhonny. 2017. Advances of Micro-Nanobubbles in wastewater. In: First Regional Congress from Students of Environmental Engineering. UNMSM, Lima-Peru: 5th to 10th June 2017.